


# Technical Sheet

## OLI120 Plus Sanitarblock

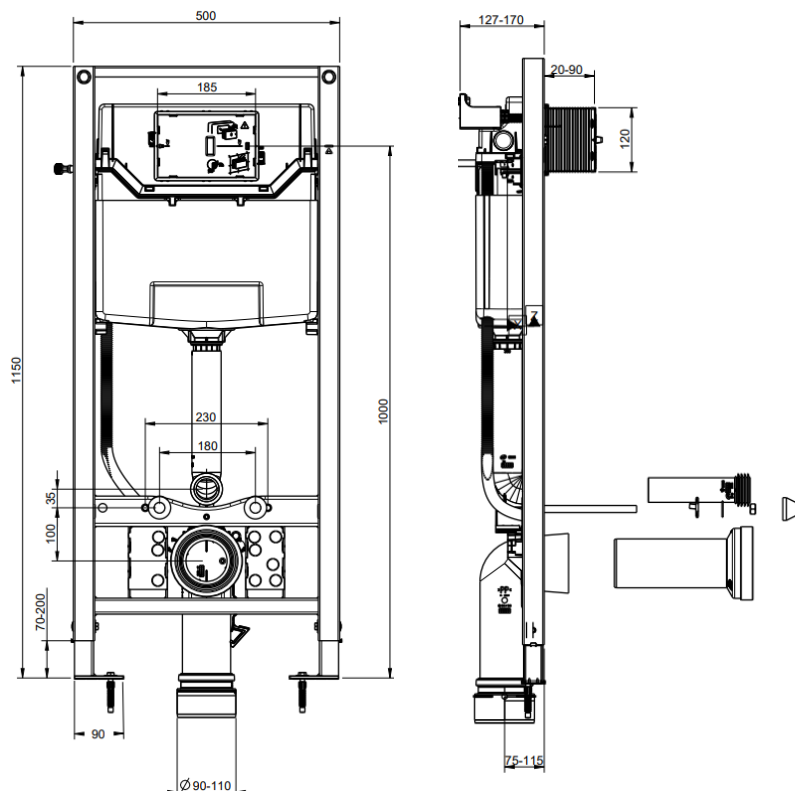

### Product Identification

885052

- OLI120 Plus Mechanic Sanitarblock

### Definition and Application

- Pre-assembled structure for installation in front of masonry wall and finish in light wall, plasterboard wall and technical support rail for light wall
- Compatible with wall hung toilets up to 660mm long.
- Pre-set shower toilet connection for smart toilets

### Technical Features

#### Structure

- In painted tubular corrosion resistant;
- Easy and quick installation with Fast Fit system;
- Minimum thickness of 127mm and adjustable up to 170mm;
- Height regulation of the adjustable floor brackets (0-200 mm);
- Wall hung toilets up to 660mm long;
- Depth adjustable outlet bend;
- Tested for 400kg load

Millimetres measures

FTC.1637.01  
Technical Sheet

www.oli-world.com  
comercial@oli.pt  
export@oli.pt

#### **Cistern**

- Dual flush in-wall cistern compatible with either dual or single flush actuators 6/3 litres (adjustable to 4/2 and 7/3);
- 127mm thickness;
- Mechanic actuation;
- Equipped with NANO Plus Inlet Valve, with delayed refilling (saves up to 9 litres of water per day); and silent according to the NF standard category Class I;
- Working pressure from 0,1 to 16 bar;
- Resistance to atmospheric humidity (Hr <90%);
- Polypropylene (PP) cistern highly resistant and inalterable to thermal stress;
- EN 14055 CE marking;
- According to BELGAQUA/NF/KIWA standards;
- Supplied with anti-condensation lining.

#### **Accessories**

- 1 Flush pipe  $\varnothing 90 \times 250$
- 1 Seal for flush pipe  $\varnothing 125$
- 1 Connecting pipe  $\varnothing 45 \times 180$
- 1 Pan rubber seal  $\varnothing 45$
- 1 Protective box
- 1 G  $\frac{1}{2}$ " stop valve
- 1 Protection sponge for the stop valve
- 1 Flush bend  $\varnothing 90 / 90$  L230
- 1 Outlet bend and  $\varnothing 90/1101$
- Protection pipe  $\varnothing 90$

#### **Fixing accessories for wall structure:**

- 4 Galvanized screws M8x60
- 4 Galvanized washers M8 DIN 9021
- 4 Bushing for metal structure

#### **Fixing accessories for toilet bowl mounting on the structure:**

- 2 Threaded rods M12
- 2 Nuts M12
- 2 Protection for threaded rod
- 2 Protection cover
- 2 Toilet centring washer
- 2 Washers Zn  $\varnothing 34$

## **Warranty**

- Ten (10) years warranty according to the general selling terms, starting from the purchase date of the product.
- If the product is not correctly installed the warranty is not valid

## **Observations**

- There are available similar products. For more information please consult our Sanitary Installation Systems catalogue or our site [www.oli-world.com](http://www.oli-world.com)